


BAYRO® 4T 10W-60

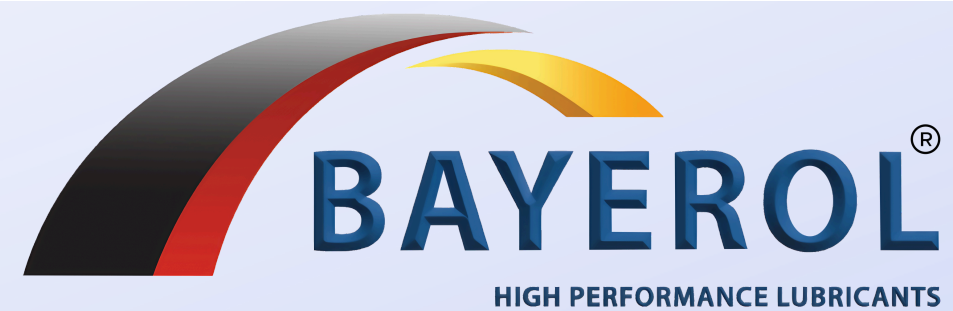

PROPERTIES:

A new generation synthetic engine oil for four-stroke motorcycles formulated with synthetic base oils combined with special developed balanced additives to achieve the following properties:

- a high and stable viscosity index
- optimal friction characteristics
- a very strong protection against wear, corrosion and foaming
- a very good detergency and dispersion.

APPLICATION:

This oil is special developed for the lubrication of four-stroke motorcycles, so that sliding, sticking and/or rough changing of the clutch-plates no longer occurs. This oil is developed and tested in co-operation with the most important motorcycle producers and has its performance demonstrated in the field.

PERFORMANCE LEVEL:

API SP

JASO MA2

TYPICAL VALUES	UNIT	BAYRO T4 10W-60
Density at 15°C	kg/m ³	0,854
Viscosity -25 °C	mPa.s	4440
Viscosity at 40°C	mm ² /s	161,00
Viscosity at 100°C	mm ² /s	24,20
Viscosity index (VI)	-	182
Pour point	°C	-33
Flash point COC	°C	236
TBN	mgKOH/g	7,1

* meets the requirements of the OEM manufacturer.
The stated values may vary within the usual commercial range.